
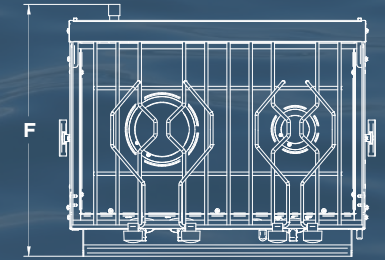
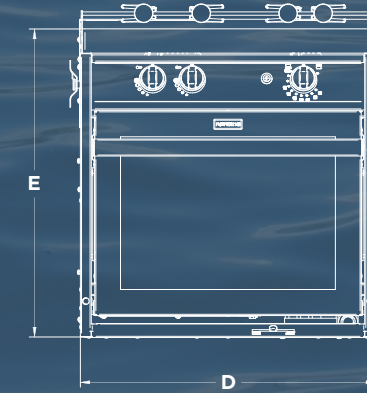


# Force 10 2-Burner Gimbaled Ranges

Force 10 2-Burner Gimbaled Ranges are available in (6) sizes to fit most OEM galley cutouts. Available Trim Kit allows for fix mounted built-in installation. All units are manufactured to ABYC standards, and constructed of thick gauge 304 polished stainless steel and marine grade components to withstand the harsh marine environment.

All Ranges include one Rapid (9200 BTU) top burner and one Auxiliary (3400 BTU) simmer burner and a thermostatically controlled oven with a broiler. Standard safety features include; thermocouple protection on each burner, gimbal locking device, a secondary door lock and sea rail with pot holders.

The 1.5 Volt push button electronic spark ignition, slide away oven door with viewing window and removable top grate provide convenience for operation and maintenance. All units operate from either Propane or Butane gas at 28-30 mbar pressure, include a (2) year warranty and have CE and AGA certification.

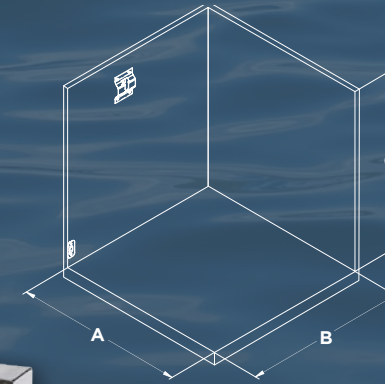

## Specifications

	American Standard	American Compact	Euro Standard	Euro Compact	Euro Sub-Compact	XM
	63251	63253	63256	63258	63254	63269
<b>A</b>	22" (559mm)	22" (559mm)	20 3/8" (518mm)	20 3/8" (518mm)	18 1/2" (470mm)	19 1/2" (496mm)
<b>B</b>	21 1/2" (546mm)	20 1/2" (521mm)	21 1/2" (546mm)	20 1/2" (521mm)	20 1/2" (521mm)	22 1/2" (572mm)
<b>C</b>	23" (590mm)	21" (533mm)	23" (590mm)	21" (533mm)	21" (533mm)	22" (559mm)
<b>D</b>	21 5/8" (549mm)	21 5/8" (549mm)	20" (508mm)	20" (508mm)	18 1/8" (460mm)	19 1/8" (486mm)
<b>E</b>	21 1/2" (546mm)	19 1/4" (489mm)	21 1/2" (546mm)	19 1/4" (489mm)	19 1/4" (489mm)	20" (508mm)
<b>F</b>	17 1/2" (445mm)	17 1/2" (445mm)	17 1/2" (445mm)	17 1/2" (445mm)	17 1/2" (445mm)	19 3/4" (502mm)
Weight lbs (Kg)	70 (32)	66 (30)	66 (30)	63 (29)	60 (27)	66 (30)
Oven Volume (L)	25	19	23	17	14	20