


20 GALLON




20 GAL Front Mount, 120V, Front Heat Exchange 11871

- Dimensions: 16.25 in W x 16.25 in H x 34.125 in D
- Mount Arrangement: Front-Rear
- Electrical Input: 120V - 60Hz/1500W
- Wiring Configuration: L1 & N
- T&P Valve Type: 150psi & 210° F, CSA




20 GAL Front Mount, 240V, Front Heat Exchange 11881

- Dimensions: 16.25 in W x 16.25 in H x 34.125 in D
- Mount Arrangement: Front-Rear
- Electrical Input: 240V - 50Hz/1500W
- Wiring Configuration: L1 & N
- T&P Valve Type: 150psi & 210° F, CSA



20 GAL Front Mount, 240V, Front Heat Exchange 11897

- Dimensions: 16.25 in W x 16.25 in H x 34.125 in D
- Mount Arrangement: Front-Rear
- Electrical Input: 240V - 60Hz/1500W
- Wiring Configuration: L1 & L2
- T&P Valve Type: 75psi & 210° F, CSA




**20 GAL, Vertical 4-WAY Mount, 120V, Front Heat Exchange
11870**

- Dimensions: 18.875 in W x 29.75 in H x 20.75 in D
- Mount Arrangement: 4-Way
- Electrical Input: 120V - 60Hz/1500W
- Wiring Configuration: L1 & N
- T&P Valve Type: 150psi & 210° F, CSA

**20 GAL, Vertical 4-Way Mount, 240V, Front Heat Exchange
11880**

- Dimensions: 18.875 in W x 29.75 in H x 20.75 in D
- Mount Arrangement: 4-Way
- Electrical Input: 240V - 50Hz/1500W
- Wiring Configuration: L1 & N
- T&P Valve Type: 150psi & 210° F, CSA

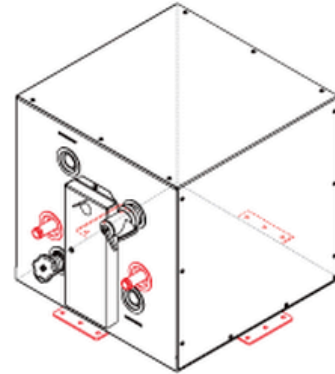

**20 GAL, Vertical 4-WAY Mount, 240V, Front Heat Exchange
11890**

- Dimensions: 18.875 in W x 29.75 in H x 20.75 in D
- Mount Arrangement: 4-Way
- Electrical Input: 240V - 60Hz/1500W
- Wiring Configuration: L1 & L2
- T&P Valve Type: 150psi & 210° F, CSA