


ULTRA *Ultra Flip Swivel*

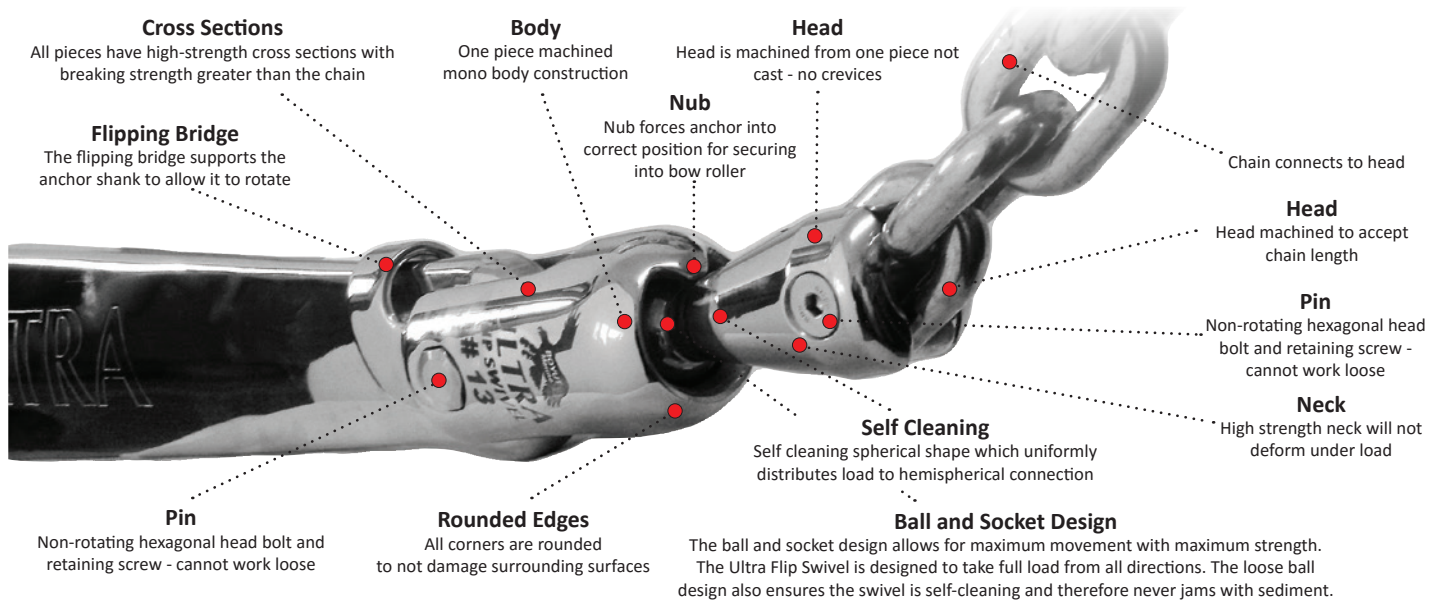

Overview

The Ultra Swivel is a uniquely fabricated anchor swivel, connecting the chain and anchor without the need of additional shackles. Fabricated from 316 stainless steel and hand polished for stunning presentation on the bow, the Ultra Swivel is uniquely strong, slimline and does not require any locking pins or safety wires.

The breaking strength of the swivel is typically higher than the chain connected and allows 30 degree rotation with complete 360 degree swivel. The Ultra Swivel is fabricated with a unique flipping nub; assisting to recover the anchor right-way up onto the bow roller. This flipping nub, combined with the Ultra Swivel's rotation and complete 360 degree swivel ability, ensures setting and recovering your anchor is an easier and safer task.

Hexagonal head locking bolts prevent the need for additional grub screws to secure the swivel pins. Every Ultra Swivel has the breaking strength listed on the rear of its one piece body.

Supplied with a standard three year warranty the Ultra Swivel incorporates unique design features and advantages, making it the world's most advanced anchor swivel.



Top View

Side View

$\alpha = 28^{\circ} - 30^{\circ}$ (approximately)

TYPE #	CHAIN DIAMETER		WHOLE LENGTH APPROXIMATELY A	chain part dimensions b·c·d·e·f	ANCHOR PART DIMENSIONS B·C·D·E·F	FLIPPING BRIDGE DIMENSIONS G·H	BREAKING LOAD (t)	MAXIMUM ANCHOR WEIGHT	
	mm	inch	mm	mm	mm	mm	kN	lbf	kg
ufs 6–12	6	1/4"	121	25×7,6×7×9×11	35×16×11×13×31	14×17	38,4	8640	12
	6	1/4"							
ufs 8–21	8	5/16"	147,5	30×9,4×9×11×14,5	40×19×13×16×36,5	18,5×20	56,7	12740	21
	8	5/16"							
ufs 10–35	10	3/8"	168	35×11,6×11×13×17	45×21×14,5×18×40	21×22,5	90,7	20400	35
	10	3/8"							
ufs 13–60	12	1/2"	211,5	45×15,2×14,5×16,5×23	55×26×18×23×51,5	26,5×30	160,9	36200	60
	12	1/2"							
ufs 16–100	13	1/2"	250	53×18,2×18×20×27	65×30,6×22×27×59	33×36	236,5	53200	100
	14	5/8"							
ufs 20–160	16	5/8"	309	65×23×22×26×34	75×38×26×32×72	40×40,5	321,5	72300	160
	16	5/8"							
ufs 26–250	18	3/4"	364	75×26×22×26×34	85×42×26×32×72	40×40,5	321,5	72300	160
	18	3/4"							
ufs 26–250	20	3/4"	364	75×26×22×26×34	85×42×26×32×72	40×40,5	321,5	72300	160
	20	3/4"							
ufs 26–250	23	1"	364	75×26×22×26×34	85×42×26×32×72	40×40,5	321,5	72300	160
	23	1"							
ufs 26–250	26	1"	364	75×26×22×26×34	85×42×26×32×72	40×40,5	321,5	72300	160
	26	1"							

(*) - Tested by RINA (except UFS 34-360).

- Safe Working Load = 0.5 x Breaking Load

- One size bigger UFS can also be used with the same chain. Therefore one size bigger swivel should be selected for chain such as Grade 70 (G7)

- UFS selection should be based on the "Max. Anchor Weight". If the "Max. Anchor Weight" is not enough, one size bigger UFS should be selected.

- Custom swivel without the flipping nub could also be made for symmetrical stockless anchors.

Note: Ultra Flip Swivel not recommended/compatible for use with sliding shank anchors (eg. sliding slot, rock slot, shackle slot...)