



## WELD-ON & BOLT-ON BLOCK ANODES

To suit pleasure craft, commercial vessels, ships hulls, rudders, buoys, ballast tanks, bow thrusters, heat exchangers, piers, wharves and jetties and sea chests.


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Mag	<b>CDM-1.0S</b>	0.7kg	1.0kg	Gal steel 25 x 5	260	155	75	45




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ1-66-1S</b>	4.0kg	4.2kg	Gal steel 25 x 3	275	155	155	25
Alum	<b>CDA-1.5S Type 1</b>	1.6kg	1.8kg	Mild steel 25 x 3	275	155	155	25




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ1-103-125S</b>	3.3kg	3.6kg	Gal steel 32 x 3	350	245	75	32
Alum	<b>CDA-1.55S Type 1</b>	1.3kg	1.6kg	Mild steel 32 x 3	350	245	75	32




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ2-73-125S</b>	2.6kg	2.8kg	Gal steel 25 x 3	295	175	77	33
Alum	<b>CDA-1S Type 2</b>	1.1kg	1.3kg	Mild steel 25 x 3	295	175	77	33




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ2-63-1S</b>	1.9kg	2.1kg	Gal steel 25 x 3	295	160	80	25
Zinc	<b>CDZ2-63-1ALS</b>	1.9kg	2.0kg	Aluminium 25 x 3	295	160	80	25




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ2-43-1S</b>	1.3kg	1.4kg	Gal steel 25 x 3	195	100	75	27



Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ2-63-1.60S</b>	2.2kg	2.4kg	Gal steel 20 x 3	275	150	65	40




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ2-415-1S</b>	0.6kg	0.7kg	Gal steel 20 x 2	195	103	38	25
Zinc	<b>CDZ2-515-1S</b>	0.7kg	0.8kg	Gal steel 20 x 2	195	125	38	25



# BOLT-ON ANODES (continued)


Alloy	Part Number	Net Wt	Gross Wt	Insert	O/L	Length	Width	Height
Zinc	<b>CDZ8-126S Type 2</b> Maritimo Replacement - Large	8.4kg	8.8kg	Gal steel 25 x 5 with 2 x 10 dia holes. 365 between hole centres	395	310	155	35
Alum	<b>CDA8-126S Type 2</b> Maritimo Replacement - Large	3.2kg	3.6kg	Mild steel 25 x 5 with 2 x 10 dia holes. 365 between hole centres	395	310	155	35

Also available with a Stainless Steel insert

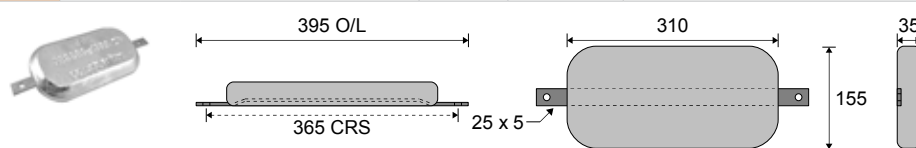


Alloy	Part Number	Net Wt	Gross Wt	Insert	Length	Width	Height "H"
Zinc	<b>CDZ8-123-150H</b>	4.5kg	4.7kg	Mild steel flat 50 x 3	300	80	40
Zinc	<b>CDZ8-123-200H</b>	6.2kg	6.4kg	Mild steel flat 50 x 3	300	80	50

Mounting: 2 slotted holes 18 Ø x 31 long. 200 between hole centres.  
Mounting Recess: 38 Ø x 26



Alloy	Part Number	Net Wt	Gross Wt	Insert	Hole Centre Dist "CRS"	Length	Width	Height
Zinc	<b>CDZ8-10H Type 1</b>	6.3kg	6.5kg	Mild steel flat 50 x 3	150	250	125	40
Alum	<b>CDA-2.5H Type 1</b>	2.3kg	2.5kg	Mild steel flat 50 x 3	150	250	125	40
Zinc	<b>CDZ8-10H Type 2</b>	6.3kg	6.5kg	Mild steel flat 50 x 3	110	250	125	40
Alum	<b>CDA8-10H Type 2</b>	2.3kg	2.5kg	Mild steel flat 50 x 3	110	250	125	40
Zinc	<b>CDZ8-10H Type 3</b>	6.3kg	6.5kg	Mild steel flat 50 x 3	100	250	125	40
Alum	<b>CDA8-10H Type 3</b>	2.3kg	2.5kg	Mild steel flat 50 x 3	100	250	125	40

Mounting:  
2 slotted holes 18 Ø x 31 long  
Mounting recess: 45 Ø x 22




Alloy	Part Number	Net Wt	Gross Wt	Insert	Length	Width	Height
Zinc	<b>CDZ8-12-2.5-1.25H</b>	3.3kg	3.5kg	Mild steel flat 25 x 3	300	60	30

Mounting:  
2 x 14 Ø holes  
200 between hole centres  
Mounting Recess: 24 Ø x 16




Alloy	Part Number	Net Wt	Gross Wt	Insert	Length	Width	Height "H"
Zinc	<b>CDZ8-126-1.25H</b>	7.0kg	7.3kg	Mild steel flat 50 x 3	305	145	32
Zinc	<b>CDZ8-126-1.37H</b>	8.3kg	8.6kg	Mild steel flat 50 x 3	305	145	35
Alum	<b>CDA-3H Type 1</b>	3.0kg	3.3kg	Mild steel flat 50 x 3	305	145	35
Zinc	<b>CDZ8-126-200H Type 1</b>	12.7kg	13.0kg	Mild steel flat 50 x 3	305	145	50

Mounting:  
2 x 24 Ø holes  
158 between hole centres  
Mounting Recess: 55 Ø x 20




Alloy	Part Number	Net Wt	Gross Wt	Insert	Length	Width	Height "H"
Zinc	<b>CDZ8-126-1.50H Type 2 NEW</b>	8.0kg	8.2kg	Mild steel flat 50 x 3	305	145	38
Alum	<b>CDA8-126-1.50H Type 2 NEW</b>	2.9kg	3.1kg	Mild steel flat 50 x 3	305	145	38

Mounting:  
2 x slotted holes 18 Ø x 70 long  
Mounting Recess: 50 Ø x 23 deep




Alloy	Part Number	Net Wt	Gross Wt	Insert	Length	Width	Height
Zinc	<b>CDZ8-124-2.0H</b>	8.3kg	8.6kg	Mild steel flat 50 x 3	305	112	50
Alum	<b>CDA-3H Type 2</b>	3.1kg	3.4kg	Mild steel flat 50 x 3	305	112	50

Mounting:  
2 slotted holes 22 Ø x 30 long  
150 between hole centres  
Mounting recess: 55 Ø x 25




## WELD-ON & BOLT-ON BLOCK ANODES (continued)


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Mag	<b>CDM-3.5S</b>	2.7kg	3.5kg	Gal steel 40 x 5	500	340	155	40




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height "H"
Zinc	<b>CDZ8-14-200S</b>	14.2kg	15.0kg	Mild steel 40 x 5	500	350	150	50
Alum	<b>CDA-5S Type 1</b>	4.2kg	5.0kg	Mild steel 40 x 5	500	350	150	40




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ8-18S</b>	8.0kg	8.7kg	Mild steel 32 x 5	550	440	90	43
Alum	<b>CDA8-18S</b>	3.0kg	3.7kg	Mild steel 32 x 5	550	440	90	43

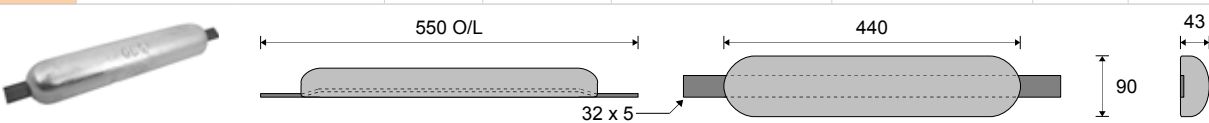


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height "H"
Zinc	<b>CDZ8-124-125S</b>	6.8kg	7.3kg	Mild steel 32 x 5	450	300	100	35
Zinc	<b>CDZ8-124-200S</b>	10.0kg	10.5kg	Mild steel 32 x 5	450	300	100	50




Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ8-16-1.25S</b>	11.0kg	11.8kg	Mild steel 40 x 5	530	400	150	35

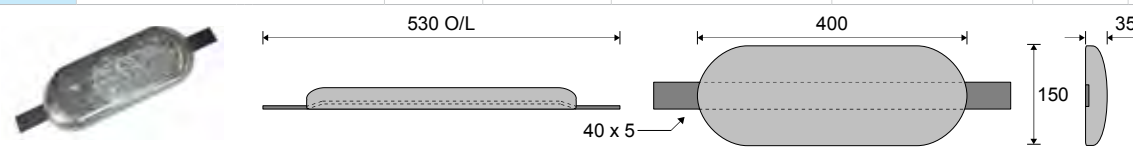


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ3-345S</b>	12.2kg	13.0kg	Mild steel 40 x 5	495	345	130	70
Alum	<b>CDA3-345S</b>	4.6kg	5.2kg	Mild steel 40 x 5	495	345	130	70

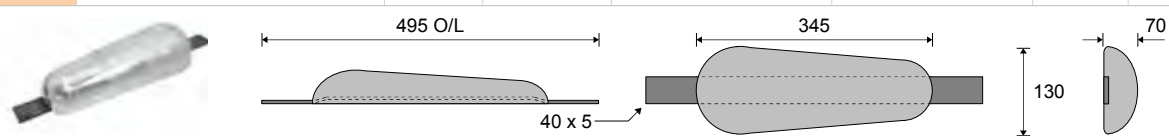

Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ3-16S</b>	34.0kg	35.0kg	Mild steel 40 x 5	700	410	200	110
Alum	<b>CDA3-16S</b>	12.9kg	13.9kg	Mild steel 40 x 5	700	410	200	110

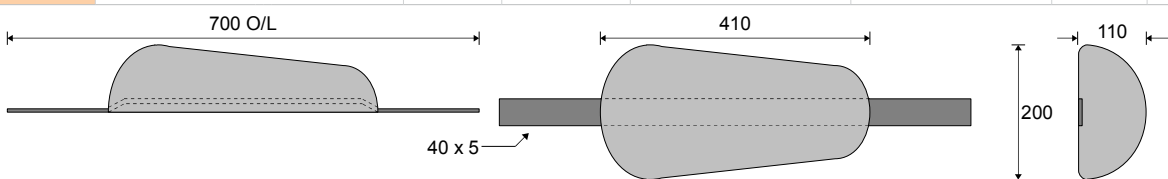


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Alum	<b>CDA-6S Type 2</b>	5.3kg	6.5kg	Mild steel 40 x 5	800	510	120	40

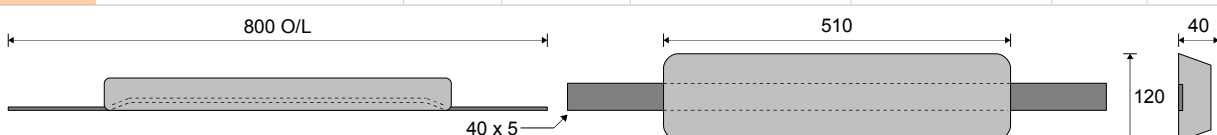


## WELD-ON &amp; BOLT-ON BLOCK ANODES (continued)


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height "H"
Zinc	<b>CDZ8-20-175S</b>	16.8kg	18.0kg	Mild steel 40 x 5	800	515	130	50
Alum	<b>CDA-8S Type 1</b>	6.8kg	8.0kg	Mild steel 40 x 5	800	515	130	50
Zinc	<b>CDZ8-20-200S</b>	18.8kg	20.0kg	Mild steel 40 x 5	800	515	130	55
Zinc	<b>CDZ8-20-250S</b>	22.8kg	24.0kg	Mild steel 40 x 5	800	515	130	60

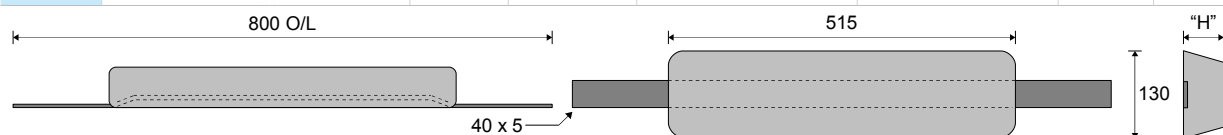


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height "H"
Zinc	<b>CDZ8-22-200S</b>	20.8kg	22.0kg	Mild steel 40 x 5	800	540	127	55
Alum	<b>CDA-9S Type 3</b>	7.6kg	8.8kg	Mild steel 40 x 5	800	540	127	55
Zinc	<b>CDZ8-22-250S</b>	25.8kg	27.0kg	Mild steel 40 x 5	800	540	127	65
Alum	<b>CDA-12S</b>	10.5kg	11.7kg	Mild steel 40 x 5	800	540	127	70
Alum	<b>CDA-13S Type 2</b>	11.8kg	13.0kg	Mild steel 40 x 5	800	540	127	75

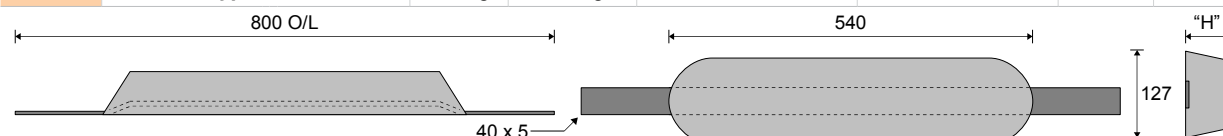


Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width "W"	Height "H"
Zinc	<b>CDZ8-24-200S</b>	24.8kg	26.0kg	Mild steel 40 x 5	800	605	120	60
Zinc	<b>CDZ8-24-250S</b>	33.8kg	35.0kg	Mild steel 40 x 5	800	605	130	75

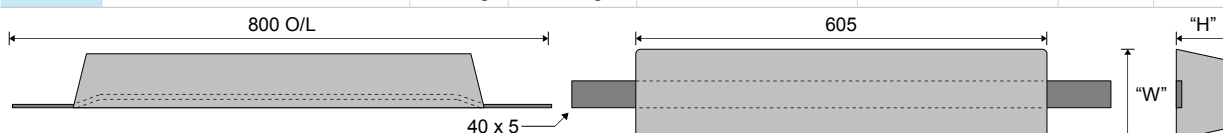

Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height "H"
Alum	<b>CDA-11S Type 1</b>	10.0kg	11.2kg	Mild steel 40 x 5	800	600	145	47
Alum	<b>CDA-15S Type 1</b>	13.8kg	15.0kg	Mild steel 40 x 5	800	600	145	65
Alum	<b>CDA-20S Type 2</b>	20.0kg	21.2kg	Mild steel 40 x 5	800	600	145	90

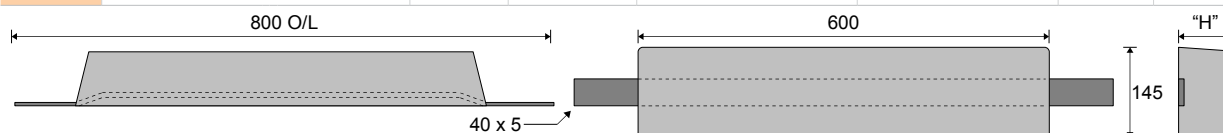

Alloy	Part Number	Net Wt	Gross Wt	Insert	Overall Length	Length	Width	Height
Zinc	<b>CDZ8-40S</b>	33.4kg	36.0kg	Mild steel 40 x 5	1400	1000	100	60

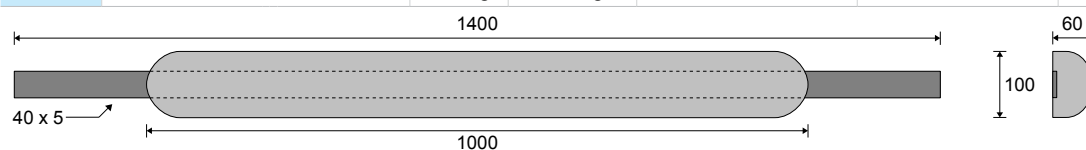

Alloy	Part Number	Net Wt	Gross Wt	Insert "Ø"	Overall Length	Length	Width "W"	Height "H"
Zinc	<b>CDZ8-60S 14kg</b>	12.5kg	14.0kg	Mild steel rod 12 Ø	1700	1500	37	38
Mag	<b>CDM-7.0S</b>	6.3kg	7.8kg	Gal steel rod 12 Ø	1700	1500	50	50
Zinc	<b>CDZ8-60S 27kg</b>	25.2kg	26.7kg	Mild steel rod 12 Ø	1700	1500	54	46
Alum	<b>CDA-10S Type 1</b>	10.3kg	11.8kg	Mild steel rod 12 Ø	1700	1500	54	46
Mag	<b>CDM-11.0S</b>	11.0kg	12.5kg	Gal steel rod 12 Ø	1700	1500	65	65
Zinc	<b>CDZ8-60S 45kg</b>	42.3kg	45.0kg	Mild steel rod 16 Ø	1700	1500	65	65

